



チェーンブロック

CHAIN BLOCK

HS VT SERIES

PRODUCT CATALOGUE

CV CITRA HARAPAN JAYA

Jl. Mangga Dua Abdad, Komplek Rukan Mangga Dua Elok, Blok C No.12, Kota
Jakarta Pusat, Daerah Khusus Ibukota Jakarta - 10730 | (021) 625 0149 / 625 0150

🌐 www.chj.co.id ☎ +62 877 8016 2777



FEATURES OF KOBACHI

FULLY ENCLOSED INTERNAL MECHANISM

Dirt-proof & water-proof

STOPPER SYSTEM

Stops the chain from exiting the mechanism

360° ROTATION + SAFETY LATCH

Handle & Hook

G80 LOAD CHAIN

High alloy galvanized steel


TOUGH BUILD

Thick steel gear case and reinforced hand wheel cover



CNC MACHINED INTERNAL COMPONENTS

Maximum accuracy & reliability



DOUBLE PAWL SYSTEM

For extra safety

KOBACHI VT Series Chain Block

KOBACHI VT Series Chain Block are Designed for **maximum Durability and Safety** in continuous **Heavy Duty** applications.

APPLICATIONS:

- Widely used in mining, construction, engineering, automotive, infrastructure & manufacturing industries
- Ideal for manufacturing plants, outdoor job sites, construction sites & projects

IN BOX:

- 1 Chain Block Unit x1
- 2 Certificate x1




SPECIFICATIONS


MODEL	CAPACITY (Ton)	LIFT HEIGHT (M)	PULLING CHAIN FALL LENGTH (M)	RUNNING TEST LOAD (Ton)	NO. OF COLUMN LOAD CHAIN FALLS	LOAD CHAIN DIAMETER (mm)	PACKAGING DIMENSIONS (LXWXH) (cm)	GROSS WEIGHT (Kg)
HS-VT 0.5T	0.5	3	2.8	0.75	1	5	29 x 21 x 22	8.8
HS-VT 1T	1	3	2.8	1.5	1	6.3	28 x 17.5 x 21	13.6
HS-VT 1T	1	5	4.8	1.5	1	6.3	28 x 17.5 x 21	14.4
HS-VT 1T	1	10	9.8	1.5	1	6.3	31 x 22 x 28	22.9
HS-VT 1T	1	15	14.8	1.5	1	6.3	43 x 22 x 35	34.8
HS-VT 2T	2	3	2.8	3	1	8	31 x 20.5 x 27.5	22
HS-VT 2T	2	5	4.8	3	1	8	31 x 20.5 x 28	25.5
HS-VT 2T	2	10	9.8	3	1	8	37 x 21 x 28	33.9
HS-VT 2T	2	15	14.8	3	1	8	43 x 22 x 35	50
HS-VT 3T	3	3	2.8	4.5	2	7.1	31.5 x 20.5 x 28	24
HS-VT 3T	3	5	4.8	4.5	2	7.1	35 x 20.5 x 28	32.4
HS-VT 3T	3	10	9.8	4.5	2	7.1	43 x 21.5 x 32.5	50.9
HS-VT 3T	3	15	14.8	4.5	2	7.1	43 x 22 x 35	53.1
HS-VT 5T	5	3	2.8	7.5	2	9	43.5 x 22 x 34	40
HS-VT 5T	5	5	4.8	7.5	2	9	43 x 23 x 33	50.6
HS-VT 5T	5	10	9.8	7.5	2	9	43 x 28 x 34	77.1
HS-VT 5T	5	15	14.8	7.5	2	9	53.5 x 26 x 46.5	114.2
HS-VT 10T	10	5	4.8	15	4	9	54 x 25 x 44	83.7
HS-VT 10T	10	10	9.8	15	4	9	55 x 27 x 48	123
HS-VT 10T	10	15	14.8	15	4	9	60 x 32 x 53.5	171
HS-VT 20T	20	10	9.8	30	8	9	75 x 42 x 71	314
HS-VT 20T	20	15	14.8	30	8	9	75.5 x 48 x 76.5	411


DIMENSIONS

MODEL	PLEASE REFER TO THE DIAGRAM		
	A	B	C (Standard Lift Height 3 Meter)
HS-VT 0.5T	129	136	270
HS-VT 1T	151	145	317
HS-VT 1T	151	145	317
HS-VT 1T	151	145	317
HS-VT 1T	151	145	317
HS-VT 2T	161.5	187	414
HS-VT 2T	161.5	187	414
HS-VT 2T	161.5	187	414
HS-VT 2T	161.5	187	414

0.5 t, 1 t, 1.5 t, 2 t

	HS-VT 3T	150.5	185	465	
	HS-VT 3T	150.5	185	465	
	HS-VT 3T	150.5	185	465	
	HS-VT 3T	150.5	185	465	
	HS-VT 5T	161.5	241	636	
	HS-VT 5T	161.5	241	636	
	HS-VT 5T	161.5	241	636	
	HS-VT 5T	161.5	241	636	

	HS-VT 10T	207	398	798	
	HS-VT 10T	207	398	798	
	HS-VT 10T	207	398	798	

	HS-VT 20T	215	650	890	
	HS-VT 20T	215	650	890	



チェーンブロック

CHAIN BLOCK

HS VD SERIES

PRODUCT CATALOGUE

CV CITRA HARAPAN JAYA

Jl. Mangga Dua Abdad, Komplek Rukan Mangga Dua Elok, Blok C No.12, Kota
Jakarta Pusat, Daerah Khusus Ibukota Jakarta - 10730 | (021) 625 0149 / 625 0150

www.chj.co.id ☎ +62 877 8016 2777



FEATURES OF KOBACHI

FULLY ENCLOSED INTERNAL MECHANISM

Dirt-proof & water-proof

STOPPER SYSTEM

Stops the chain from exiting the mechanism

360° ROTATION + SAFETY LATCH

Handle & Hook

G80 LOAD CHAIN

High alloy galvanized steel


TOUGH BUILD

Thick steel gear case and reinforced hand wheel cover



BALL BEARING

Easy use & maintenance



DOUBLE PAWL SYSTEM

For extra safety

KOBACHI VD Series Chain Block

Kobachi VD Series are designed to be easy to operate & maintain while still maintaining maximum **Durability and Safety** in continuous **Heavy Duty** applications.

APPLICATIONS:

- Widely used in mining, construction, engineering, automotive, infrastructure & manufacturing industries
- Ideal for manufacturing plants, outdoor job sites, construction sites & projects

IN BOX:

- 1 Chain Block Unit x1
- 2 Certificate x1
- 3 Hand Gloves x1 Pair



SPECIFICATIONS

MODEL	CAPACITY (Ton)	LIFT HEIGHT (M)	PULLING CHAIN FALL LENGTH (M)	RUNNING TEST LOAD (Ton)	NO. OF COLUMN LOAD CHAIN FALLS	LOAD CHAIN DIAMETER (mm)	GROSS WEIGHT (Kg)	PACKAGING DIMENSIONS (LXWXH) (cm)
HS-VD 1T	1	3	2.8	1.5	1	6	11.7	30 x 18 x 21
HS-VD 1T	1	5	4.8	1.5	1	6	14.05	30 x 18 x 21
HS-VD 2T	2	3	2.8	3	1	8	17.5	31 x 20 x 26
HS-VD 2T	2	5	4.8	3	1	8	21.7	34 x 20 x 25
HS-VD 3T	3	3	2.8	4.5	2	7.1	24.05	38 x 20 x 26
HS-VD 3T	3	5	4.8	4.5	2	7.1	30.5	38 x 20.5 x 27
HS-VD 5T	5	3	2.8	7.5	2	9	36.15	43 x 21 x 33
HS-VD 5T	5	5	4.8	7.5	2	9	44.25	43 x 21 x 33

DIMENSIONS (mm)				
MODEL	PLEASE REFER TO THE DIAGRAM			
	A	B	C	H (Standard Lift Height 3 Meter)
HS-VD 1T	151	172	32	376
HS-VD 1T	151	172	32	376
HS-VD 2T	175	196	36	470
HS-VD 2T	175	196	36	470

DIMENSIONS (mm)				
MODEL	PLEASE REFER TO THE DIAGRAM			
	A	B	C	H (Standard Lift Height 3 Meter)
HS-VD 3T	176	185	46	565
HS-VD 3T	176	185	46	565
HS-VD 5T	189	280	46	688
HS-VD 5T	189	280	46	688



レバーブロック

LEVER HOIST

PRODUCT CATALOGUE


CV CITRA HARAPAN JAYA

Jl. Mangga Dua Abdad, Komplek Rukan Mangga Dua Elok, Blok C No.12, Kota
Jakarta Pusat, Daerah Khusus Ibukota Jakarta - 10730 | (021) 625 0149 / 625 0150

🌐 www.chj.co.id ☎ +62 877 8016 2777



FEATURES OF KOBACHI

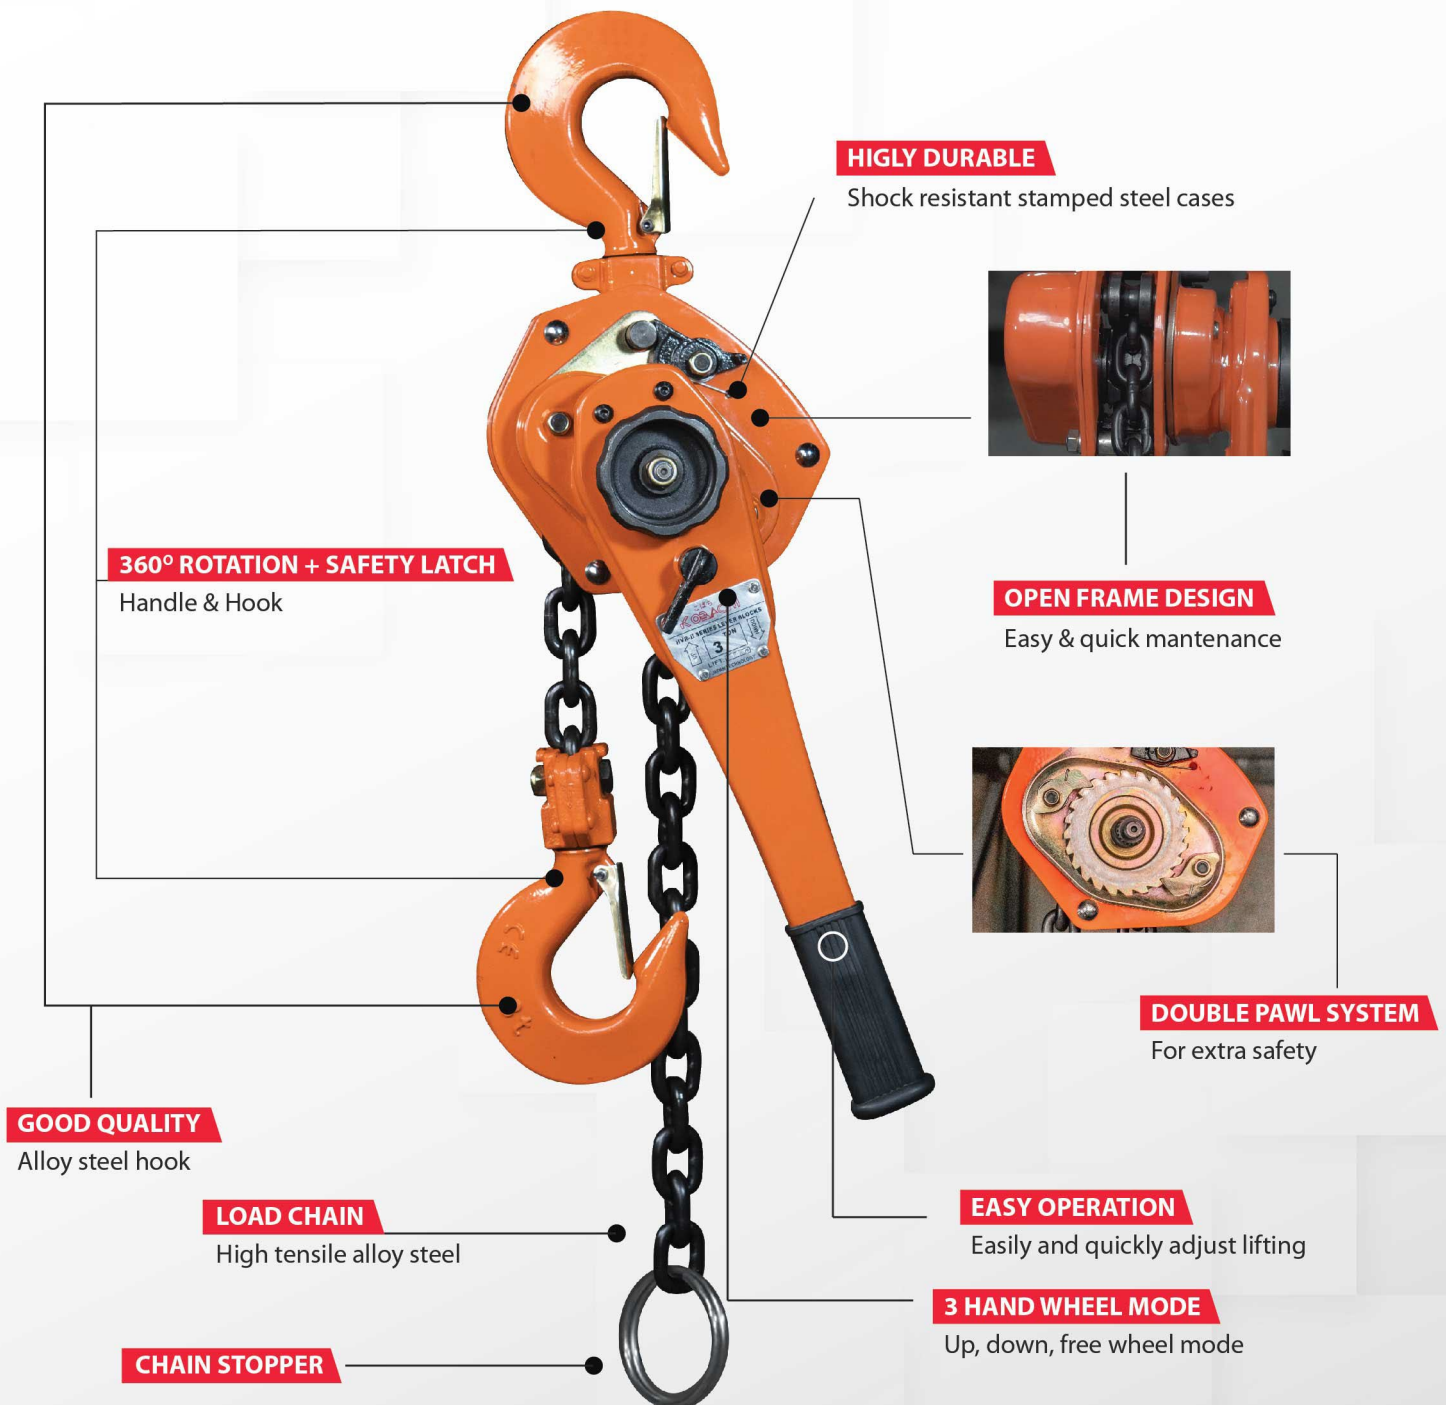

KOBACHI HVR-II SERIES

Kobachi HVR-II Series are designed with capacities and features that make it ideal for all industrial lifting, pulling, lower and fasten needs.

APPLICATIONS:

- Used for loading a truck, centering building material at construction site, setting up or moving machinery and other heavy objects such as pipes, and so on.
- Ideal for transportation, manufacturing plants, shipyards, construction sites, mines and forestry.






SPECIFICATIONS

MODEL	CAPACITY (Ton)	LIFT HEIGHT (m)	CHAIN FALL	CHAIN DIAMETER (mm)	RUNNING TEST LOAD (Ton)	WEIGHT (kg)	PACKAGING DIMENSIONS (L x W x H) (cm)
HVR075	0.75	1.5	1	6.3	1.125	7	48 x 18 x 16.5
HVR150	1.5	1.5	1	7.1	2.25	11.6	50 x 20 x 18.5
HVR300	3	1.5	1	9	4.5	15.5	52 x 22 x 20
HVR600	6	1.5	2	9	9	28.9	55 x 23.5 x 25



DIMENSIONS

MODEL	PLEASE REFER TO THE DIAGRAM			
	A	B	C	E
HVR075	155	88	135	250
HVR150	170	110	162	370
HVR300	198	120	211	370
HVR600	198	120	254	370

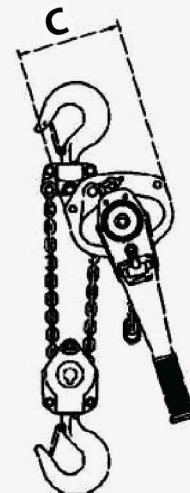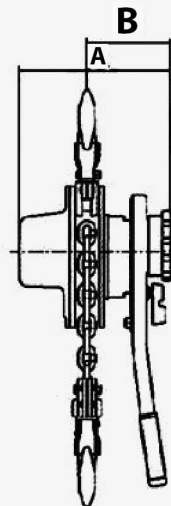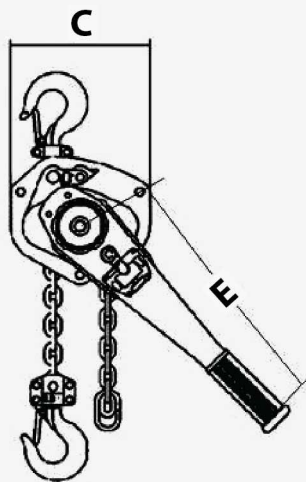

PLAIN TROLLEY HVP - II



APPLICATIONS:


- Generally installed on straight/curved rails or beams, enables easy lateral traverse of large loads with either manual or powered chain hoists.
- Suitable to be used in factories, mines, docks, warehouses, construction sites, etc., especially for equipment maintenance work in places without power supply.

SPECIFICATIONS

MODEL	CAPACITY (Ton)	PROOF LOAD (Ton)	I-BEAM WIDTH (mm)	MIN. RADIUS CURVE (m)	GROSS WEIGHT (Kg)
HVP-II 1	1	1.5	68-100	1000	7.1
HVP-II 2	2	3	94-124	1100	11.9
HVP-II 3	3	4.5	100-140	1300	20
HVP-II 5	5	7.5	124-180	1400	32.1
HVP-II 10	10	15	124-203	2000	91

DIMENSIONS

MODEL	A	B	C	H	F	K	S	G
HVP-II 1	208	200	236	153	1.5-3	45	-	-
HVP-II 2	235	227	253	165	1.5-3	52	-	-
HVP-II 3	268	274	302	190	1.5-3	70.5	-	-
HVP-II 5	307	297	335	213	1.5-3	71	-	-
HVP-II 10	450	440	495	330	1.5-3	80	40	195

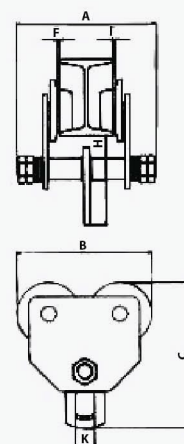

GEARED TROLLEY HVG - II



APPLICATIONS:


- Generally installed on straight/curved rails or beams, enables easy lateral traverse of large loads with either manual or powered chain hoists.
- Suitable to be used in factories, mines, docks, warehouses, construction sites, etc., especially for equipment maintenance work in places without power supply.
- Geared series features manual chain for lateral traverse.

SPECIFICATIONS

MODEL	CAPACITY (Ton)	PROOF LOAD (Ton)	I-BEAM WIDTH (mm)	MIN. RADIUS CURVE (m)	LIFTING HEIGHT (m)	CHAIN FALL LENGTH (m)	FORCE (N)	GROSS WEIGHT (Kg)	NET WEIGHT (Kg)
HVG-II 1	1	1.5	68-100	1000	3	2.8	50	11	
HVG-II 2	2	3	94-124	1100	3	2.8	90	16	15.5
HVG-II 3	3	4.5	100-140	1300	3	2.8	95	19	
HVG-II 5	5	7.5	124-180	1400	3	2.8	140	36	35
HVG-II 10	10	15	124-203	2000	3	2.8	240	96	

DIMENSIONS

MODEL	A	B	C	H	F	K	S	G
HVG-II 1	208	200	236	153	1.5-3	45	-	-
HVG-II 2	235	227	253	165	1.5-3	52	-	-
HVG-II 3	268	274	302	190	1.5-3	70.5	-	-
HVG-II 5	307	297	335	213	1.5-3	71	-	-
HVG-II 10	470	440	495	330	2.5-3	80	45	195

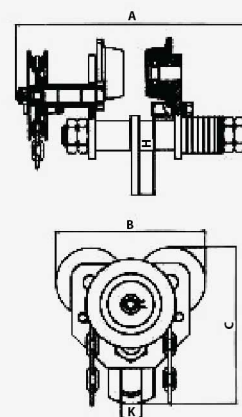



MINI SLING

PRODUCT CATALOGUE

CV CITRA HARAPAN JAYA

Jl. Mangga Dua Abdad, Komplek Rukan Mangga Dua Elok, Blok C No.12, Kota
Jakarta Pusat, Daerah Khusus Ibukota Jakarta - 10730 | (021) 625 0149 / 625 0150

www.chj.co.id ☎ +62 877 8016 2777



FEATURES OF KOBACHI

MOUNTING CLAMPS

Easily fit hollow bars

MOTOR WITH THERMAL PROTECTION

Automatically disconnect power when the motor becomes overheated.

DOUBLE CAPACITY MODE

Easy set up with extra pulley hook

UPPER / LOWER LIMIT SWITCH

HEAVY DUTY WIRE ROPE

4 times stronger


RUBBER DISC

Upper limit switch activator

TUV CERTIFIED EMERGENCY SWITCH

WEATHER-PROOF POWER CABLE & SWITCHES

Extra safety and reliability

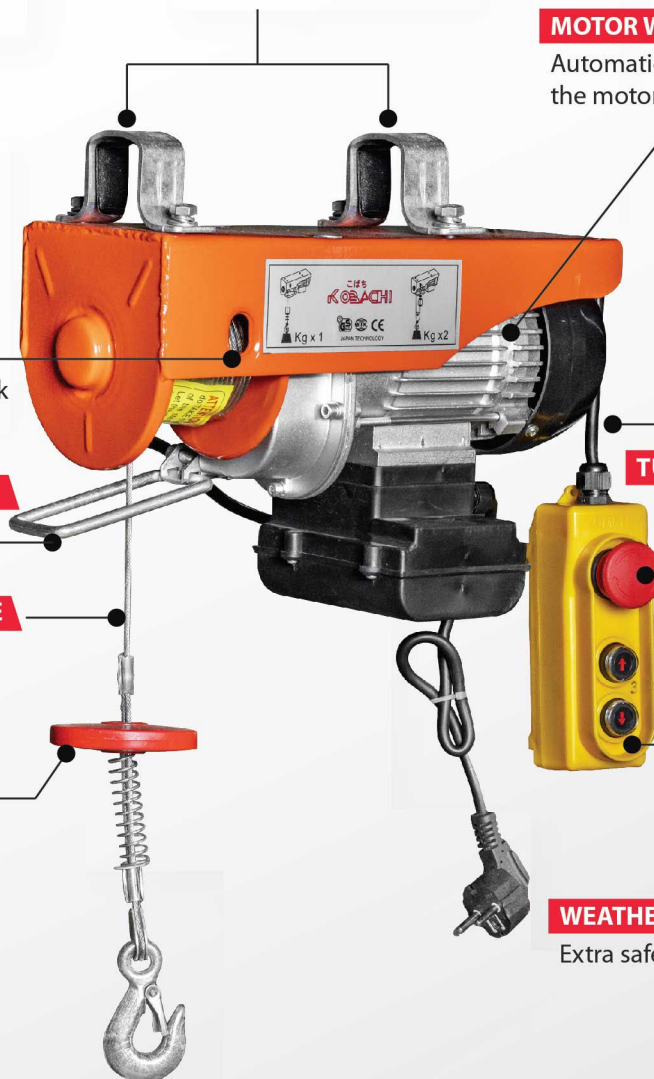

KOBACHI MINI-ELECTRIC WIRE ROPE HOIST

Kobachi Mini-Electric Wire Rope Hoist is **compact and easy to set-up and use**. It adopts single-phase power and thus making it very practical and easily used anywhere

APPLICATIONS:

- Suitable for workshops, material handling, industrial assembly lines and other small to medium industry needs.
- Also very ideal for household garages, small DIY workshops and warehouses where no three-phase power is available.



IN BOX:

- 1 1x Certificate
- 2 1x Extra Hook
- 3 1x Mounting Clamp Set

SPECIFICATIONS

MODEL	HOOK	VOLTAGE (v)	POWER (watt)	CAPACITY (Kg)	LIFTING SPEED (m/min)	LIFTING HEIGHT (m)	WIRE ROPE DIAMETER (mm)	PACKING SIZE (cm)	G/W / N/W	GROSS	ACTUAL WEIGHT (Include Box)
PA- 250	Single-hook Double-hook	220/230	550	125 250	8 4	20 10	3	38x32x25	13.5/12	13.5	11.15
PA-500	Single-hook Double-hook	220/230	1020	250 500	8 4	20 10	4	45x33x27	18.5/16.65	18.5	16.65
PA-800	Single-hook Double-hook	220/230	1300	400 800	8 4	20 10	5	45x33x27	22/19.1	22	18.9
PA-1000	Single-hook Double-hook	220/230	1600	500 1000	8 4	20 10	6	54x25x32	34/30.9	34	31.25
PA-1200	Single-hook Double-hook	220/230	1800	600 1200	8 4	20 10	6	54x25x32	35/31.9	35	31.9



CHAIN HOIST ELECTRIC

PRODUCT CATALOGUE


CV CITRA HARAPAN JAYA

Jl. Mangga Dua Abdad, Komplek Rukan Mangga Dua Elok, Blok C No.12, Kota
Jakarta Pusat, Daerah Khusus Ibukota Jakarta - 10730 | (021) 625 0149 / 625 0150

www.chj.co.id ☎ +62 877 8016 2777



FEATURES OF KOBACHI

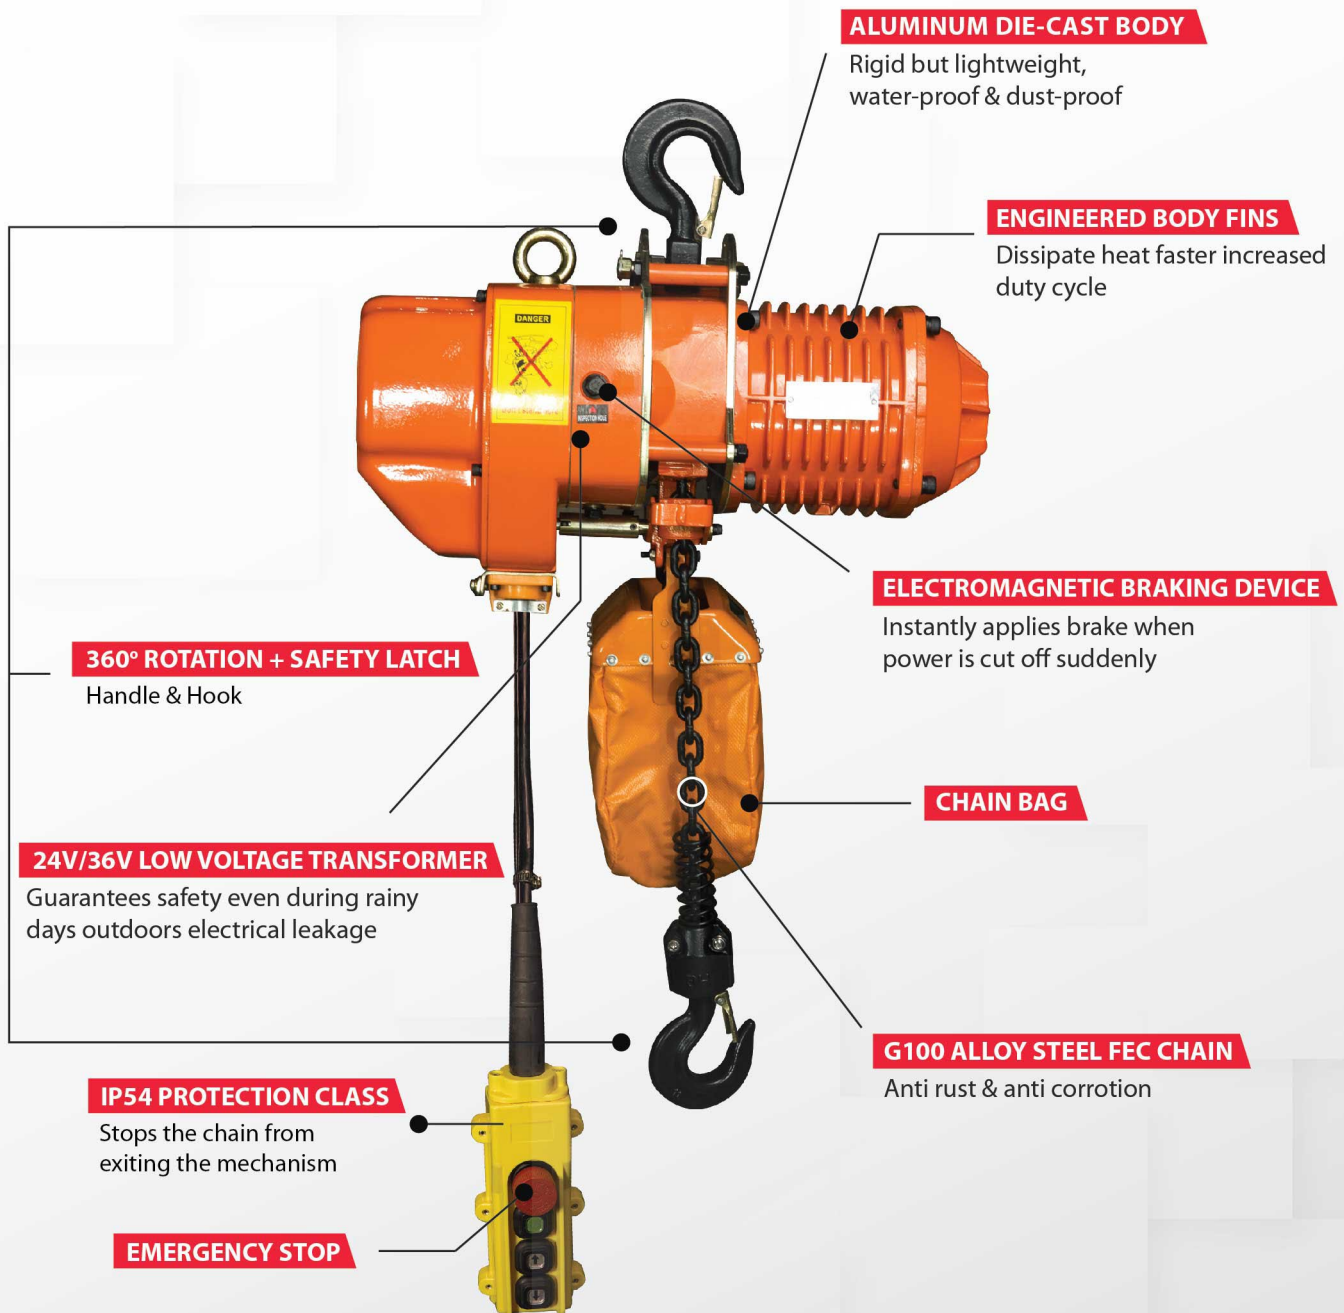

APPLICATIONS:

- Widely used in factories, mines, warehouses, cargo storage areas and workshops
- Also Ideal for manufacturing plants, outdoor job sites & construction sites



SPECIFICATIONS

MODEL	LIFTING MOTOR				
	POWER (watt)	SPEED (r/min)	Phase	Voltage (V)	Frequency (Hz)
HSY 0101S	750	1440	3	380	50
HSY 0102S1	750	1440	1	220	50
HSY 0102S3	750	1440	3	380	50
HSY 0202S	1500	1440	3	380	50
HSY 02501S	1500	1440	3	380	50
HSY 0301S	3000	1440	3	380	50
HSY 0302S	3000	1440	3	380	50
HSY 0501ST	3000	1440	3	380	50
HSY 0502ST	3000	1440	3	380	50



SPECIFICATIONS

MODEL	CAPACITY (Ton)	LIFT HEIGHT (m)	CHAIN FALL	LIFT SPEED (m/min)	CHAIN DIAMETER (mm)	WEIGHT (kg)	PACKAGING DIMENSIONS (L x W x H) (cm)
HSY 0101S	1	6	2	3.6	ø6.3	68	59 x 35 x 49
HSY 0102S1	1	12	2	3.6	ø6.3	75.6	66 x 35 x 49
HSY 0102S3	1	12	2	3.6	ø6.3	74.6	59 x 35 x 50
HSY 0202S	2	6	2	3.4	ø7.1	118	68 x 42 x 64
HSY 02501S	2	12	2	3.4	ø7.1	131	68 x 42 x 64
HSY 0301S	3	6	2	4.4	ø10	133	42 x 68 x 64
HSY 0302S	3	12	2	4.4	ø10	149	68 x 42 x 64
HSY 0501ST	5	6	2	2.8	ø11.2	155	42 x 68 x 64
HSY 0502ST	5	12	2	2.8	ø11.2	184	42 x 68 x 64

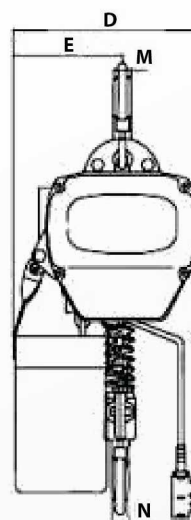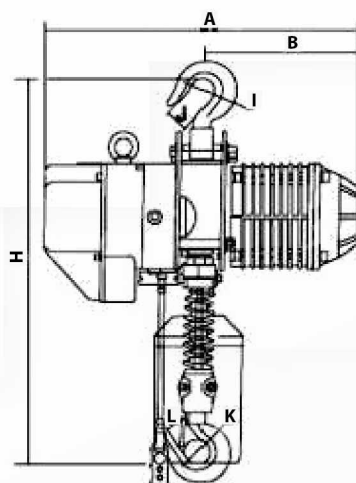

DIMENSIONS

MODEL	PLEASE REFER TO THE DIAGRAM										
	H	A	B	D	E	I	J	K	L	M	N
HSY 0101S	680	460	230	288	165	ø34	28	ø34	25	19	19
HSY 0102S1	680	460	230	288	165	ø34	28	ø34	25	19	19
HSY 0102S3	680	460	230	288	165	ø34	28	ø34	25	19	19
HSY 0202S	800	615	295	430	265	ø49	40	ø49	40	30	30
HSY 02501S	800	615	295	430	265	ø49	40	ø49	40	30	30
HSY 0301S	950	615	295	430	320	ø59	48	ø59	48	35	35
HSY 0302S	950	615	295	430	320	ø59	48	ø59	48	35	35
HSY 0501ST	1030	615	295	430	325	ø60	48	ø60	48	43	43
HSY 0502ST	1030	615	295	430	325	ø60	48	ø60	48	43	43

ELECTRIC TROLLEY for HSY Series Electric Chain Hoist



SPECIFICATIONS

CAPACITY	A	B	R	S I-BEAM (mm)	T	SPEED (m/min) 50Hz	MOTOR (Kw)	MINIMUM RADIUS OF TURN	NET WEIGHT (Kg)
1T	315	212	142	52-153	231	11 or 21	0.4	0.8	45 Kg
2T	325	220	142	82-178	231	11 or 21	0.4	0.8	53 Kg
3T	340	250	142	100-178	231	11 or 21	0.75	1	65 Kg
5T	400	291	142	100-178	231	11 or 21	0.75	1.8	88 Kg

